

Apparo Fast Edit

IBM Cognos Analytics

Reading session parameters




1 Reading session parameters

1.1 Method

You can read and use Cognos session parameters using JavaScript variables.

The Cognos session parameters are definable in the used security system of Cognos Analytics, e.g. Active Directory:

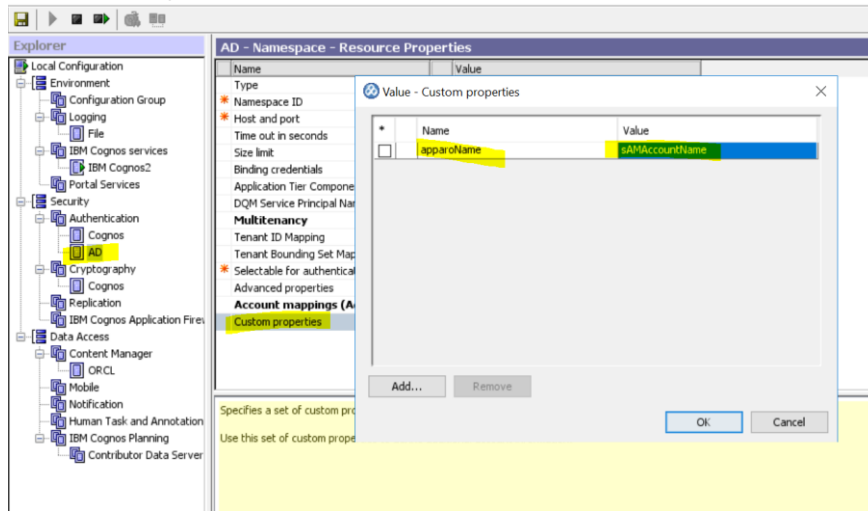

The “Value” is the name of a parameter of the Active Directory scheme, for example “sAMAccountName”.

Apparo has implemented the JavaScript method `afe.getSessionParameters()` to read all existing session parameters at once.

1.2 Examples

Script variable to display all the Cognos session parameters:

```
var params = afe.getSessionParameters();
var result = "";
var i = 0;

for(i; i < params.length; i++) {
    result = result.concat(params[i][0], ' = ', params[i][1], '\n');
}

result;
```

Script variable to return value of one certain session parameter:

```
var sessionParameters = afe.getSessionParameters();
var result = "";
var i = 0;

for(i; i < sessionParameters.length; i++) {
    if(sessionParameters[i][0] == 'userClassID') {
        result = sessionParameters[i][1];
    }
}

result;
```